


CHEMOLA

A Division of South Coast Products, Inc.

DELTA LUBRICATING EQUIPMENT AND FITTINGS

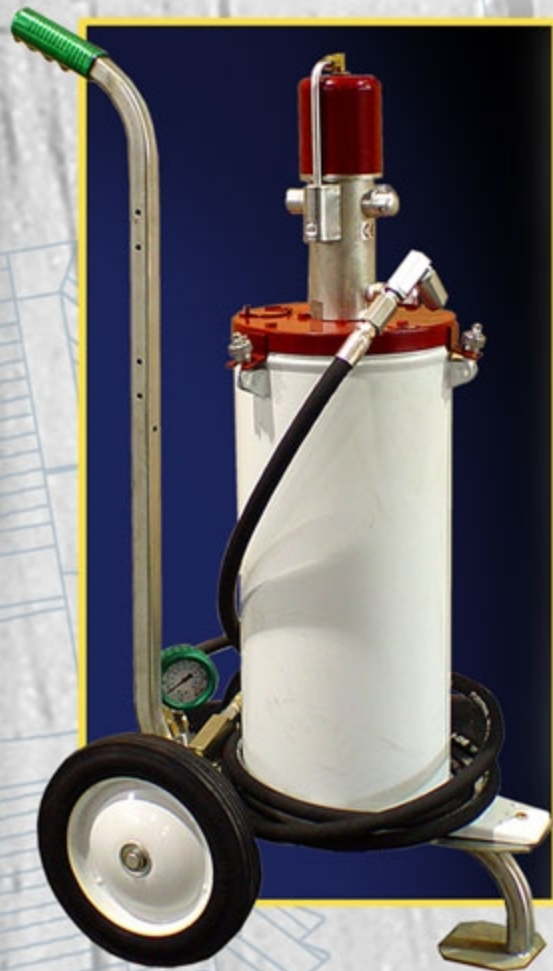

DELTA 30PP-09 PORTA-POWER AIR-OPERATED LUBRICATOR

The 30PP-09 lubricator is an air-operated portable volume pump, mounted on a rubber-tired dolly. It can be used indoors, outdoors and moves easily up and down steps. The 30PP-09 lubricator features a 100:1 ratio pressure pump with sealed-in air motor. Maximum air inlet pressure of 150 psi. may be used, but recommended inlet pressure of 100 to 120 psi. gives optimum operating range. Special follower plate and spring assembly assures positive priming of lubricants up to NLGI 4.

The 30PP-09 lubricator is complete with:

- ★ 10 foot, 3/8" I.D. 20,000 psi burst pressure lubricant hose with built-in swivels
 - ★ Z" swivel
 - ★ 15,000 psi/kpa liquid filled pressure gauge and adapter (tee)
 - ★ Saf-T-Vent block and bleed valve with giant buttonhead coupler (other hose and connections available on inquiry)
- Additional information

- ★ The 30PP-09 accommodates a five quart lubricant can
 - ★ At air inlet pressure of 120 psi, a delivery rate of approximately 15oz. / min of NLGI 2 lubricant at 77°F (25°C) may be achieved with discharge pressure of 10,000 psi.
- Dimensions: 43" high by 18" wide by 28" long
Approximate shipping weight: 60 lbs.

DELTA 2023-09 CANISTER LUBRICATOR

The Delta 2023-09 hand operated canister lubricator has a capacity for 30 lbs. of bulk lubricant / sealant. It will pump lubricants and sealants with viscosities from NLGI 1 to NLGI 3.

The Delta 2023-09 is a two-stage pump and will develop up to 15,000 psi delivery pressure.

The Delta 2023-09 hand operated lubricator is complete with a 3/8" I.D. 10 foot delivery hose with built-in swivels, z-swivel, 15,000psi/kpa liquid filled pressure gauge and adapter (tee) and Delta Saf-T-Vent coupler for 1" - 14 body lubrication fitting.

Other hose-end connections are available on inquiry.



DELTA 300H-09 TYPE "H" AIR-OPERATED LUBRICATOR

The 300H-09 lubricator is an air-operated portable volume pump, mounted on a rubber-tired swing dolly that keeps the lubricant container in an upright position at all times. It can be used indoors, outdoors and moves easily up and down steps.

The 300H-09 lubricator features a 100:1 ratio pressure pump with sealed-in air motor. Maximum air inlet pressure of 150 psi may be used, but recommended inlet pressure of 100 to 120 psi gives optimum operating range. Special follower plate and spring assembly assures positive priming of lubricants up to NLGI 4.

The Type H lubricator comes complete with:

- ★ 10 foot, 1/2" I.D. 16,000 psi burst pressure lubricant hose * Straight and "Z" swivels
- ★ 15,000 psi/kpa liquid filled pressure gauge and adapter (tee)
- ★ Volume control handle with 16" whip hose and giant buttonhead coupler * Pail stabilizer ring

Additional information

- ★ The 300H-09 accommodates either a five gallon or six gallon lubricant pail
- ★ At air inlet pressure of 120 psi, a delivery rate of approximately 15oz. / min. of NLGI 4 lubricant at 77°F (25°C) may be achieved, with discharge pressure of 10,000 psi.

Dimensions: 37" high by 19" wide by 24" long
Approximate shipping weight 88 lbs.

DELTA 2015-09 and 2016-09 HAND BUCKET GUNS


There are 2 models of hand-pumped bucket guns.

The Model 2015-09 is a light weight, compact gun that is easily attached to a three gallon, 20 lb. pail of lubricant / sealant.

The Model 2016-09 is attached to a five gallon, 40 lb. pail.

Each two-stage pump mechanism develops up to 15,000 psi delivery rate is 1/16 oz. per stroke. Both models combine the advantage and convenience of an easy pumping operation and hand gun maneuverability. The strong spring and follower plate assembly assures positive priming of all types of heavy or light bodied lubricants or sealants even in cold weather.

Each Delta Hand Bucket Gun comes complete with a 10 foot, 3/8" I.D. high pressure swivel hose with giant buttonhead coupler, follower plate and spring, 15,000 psi/kpa liquid filled gauge and an adapter (tee).

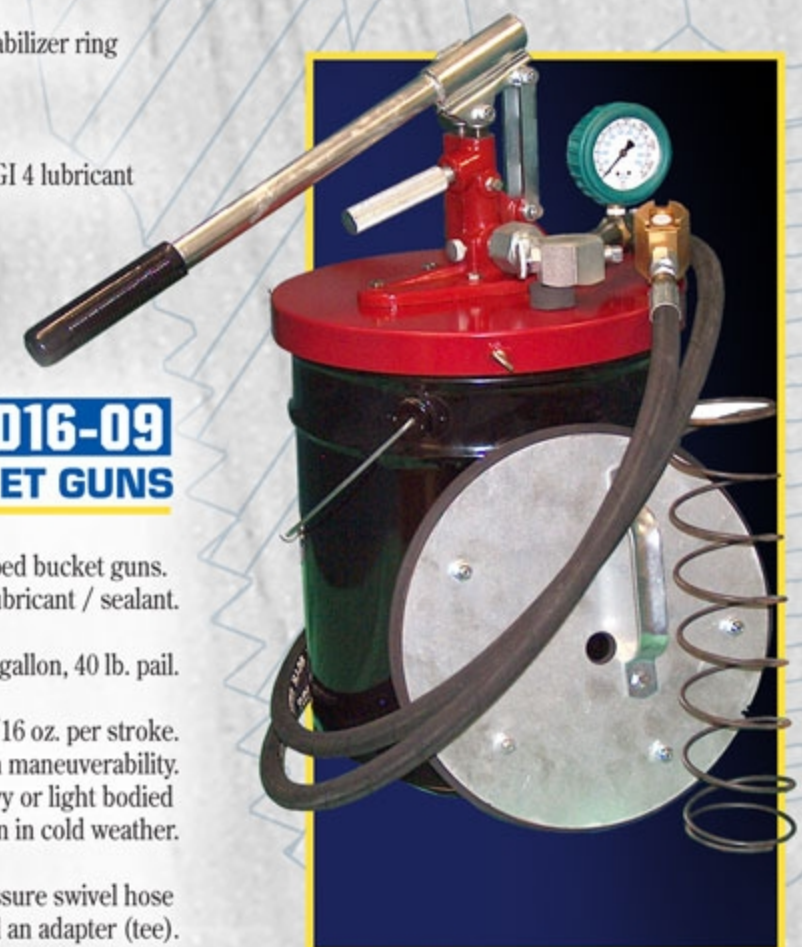

SOUTH COAST PRODUCTS 20 Southbelt Industrial Dr. Houston, TX 77047
(800) 535-5823 ★ (713) 225-0048 ★ (713) 229-8304 (fax) www.sosocusa.com